



ROCKA

Extreme and flexible for every place



5 YEARS warranty



Benefits

- **Openable** tubular luminaire with high lumen output.
- Resistance to **chemicals and UV radiation**.
- With **emergency kit available**, to cover different needs.

Characteristics

Mechanical characteristics

Profile	High thickness PMMA Clear finish
End caps	PA66 + fibreglass
Gasket	High-temperature resistant MVQ silicone
Gear tray	White lacquered steel plate + internal aluminum heatsink
Cable entry	Cable gland
Fixing clips	Stainless steel V2A



Electrical characteristics

Connection	3 push wire terminal block
THD	10% full load

IP69(80°)

IK 10 *

Frequency
0-50/60Hz

Rated voltage
220-240V

NON-SELV


Functional characteristics

Lifetime	L80 100,00 hours at 35°C
Guarantee	5 years
Fire protection	Flammability (UL94): HB Glow wire test (EN 60695-2-11): 650°

Compliance

Photometrical characteristics

SDCM	< 3
------	-----



ROCKA

Description

FAMILY	LENGTH (mm)	OPTICS	LUMINOUS FLUX (lm)	CRI	LIGHT COLOUR (K)	DRIVER	PROFILE	EMERGENCY KIT
ROCKA	0.6: 600 1.2: 1200 1.5: 1500	VW: very wide	20: 2000 35: 3500 40: 4000 60: 6000 65: 6500 80: 8000	8: >80	40: 4000	ET: non dimmable	PMMA	EB3: 3 hours

Special options under request

Ask our Sales Team
for more details

N: narrow
XW: extremely wide


9: >90

27: 2700
30: 3000
50: 5000
57: 5700
65: 6500


ETDD: DALI

More options available under request:

- High frequency sensor (HFS).
- Through wiring: 3x1.5mm², 3x2.5mm², 5x1.5mm², 5x2.5mm².



N



XW

Operational data

Description	Order number	Luminous flux (lm)	Power (W) ¹	Efficiency (lm/W)	Luminous flux emergency (lm)	Colour temperature (K)	CRI	Temperature range
ROCKA 0.6 VW 20-840 ET PMMA	10325356	2000	15	133	-	4000	> 80	-25°C - +45°C
ROCKA 0.6 VW 35-840 ET PMMA ²	10325563	3500	25	140	-	4000	> 80	-25°C - +40°C
ROCKA 1.2 VW 40-840 ET PMMA	10325547	4000	27	148	-	4000	> 80	-40°C - +50°C
ROCKA 1.2 VW 65-840 ET PMMA	10325564	6500	43	151	-	4000	> 80	-40°C - +45°C
ROCKA 1.5 VW 60-840 ET PMMA	10325548	6000	38	158	-	4000	> 80	-40°C - +50°C
ROCKA 1.5 VW 80-840 ET PMMA	10325565	8000	52	154	-	4000	> 80	-40°C - +45°C
EMERGENCY KIT								
ROCKA 0.6 VW 20-840 ET PMMA EB3	10325566	2000	20	100	700	4000	> 80	-0°C - +40°C
ROCKA 1.2 VW 40-840 ET PMMA EB3	10325567	4000	32	125	700	4000	> 80	-0°C - +45°C
ROCKA 1.5 VW 60-840 ET PMMA EB3	10325568	6000	43	140	700	4000	> 80	-0°C - +45°C


¹ In emergency versions maximum power consumption increases in 4W during battery charging, which is approximately 5% of the time that luminaire is on. The rest of the time power consumption is as indicated.

² Lifetime L80 85,000 hours

Dimensions and logistics

Description	X	Xm	Y	Z					
	mm	mm	mm	mm	L x W x H mm	Pcs./Box	Box	Groupage Pcs./Euro pallet	Double pallet Pcs./Euro pallet
ROCKA 0.6...	888	725	125	138	1010 x 160 x 140	1	3.6	50	30+30
ROCKA 1.2...	1451	1287	125	138	1600 x 160 x 140	1	5.3	50	30+30
ROCKA 1.5...	1732	1569	125	138	1900 x 160 x 140	1	6.2	50	30+30

Please check with our Back Office to confirm logistic data

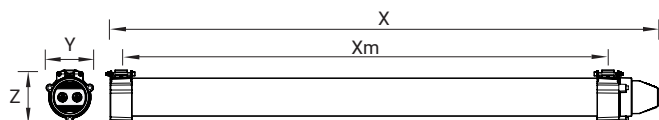

Accessories

10390769	Accessory bag ROCKA; fixing clips and antitheft screws V4A, set for 1 luminaire
58942	Fixing clips in stainless steel, 2 pieces set
10185019	Special V4A stainless steel brackets, 2 pieces set

* Accessory 10390769 is required to maintain IK10 protection in wall-mounted installations



58942



10185019



10390769