



NEZA

Sustainability and versatility
in an innovative design



NEZA

Sustainability and versatility in an innovative design

Characteristics



NEZA HE

NEZA STP

NEZA ST

5 YEARS warranty



Mechanical

IP66 IK08

Housing	Injected polycarbonate Grey RAL 7035	
Diffuser	Injected PMMA or polycarbonate, with UV protection	
Closing Clips	Stainless steel	
Gasket	Polyurethane Replaceable gasket, optional	
Gear tray	Galvanized sheet	
Cable entry	Cable gland	Grommet
Fixing clips	Stainless steel	
Suspension triangles	Stainless steel	

Electrical




Connection	3/5 pole push wire terminal block
Flicker factor	>0.95%

Functional

Lifetime	L80 100,000 hours	L80 50,000 hours
----------	-------------------	------------------

Photometrical

Luminous flux	Up to 15,000lm	Up to 6,000lm	Up to 6,000lm
Efficiency	Up to 172lm/W	Up to 158lm/W	Up to 136lm/W

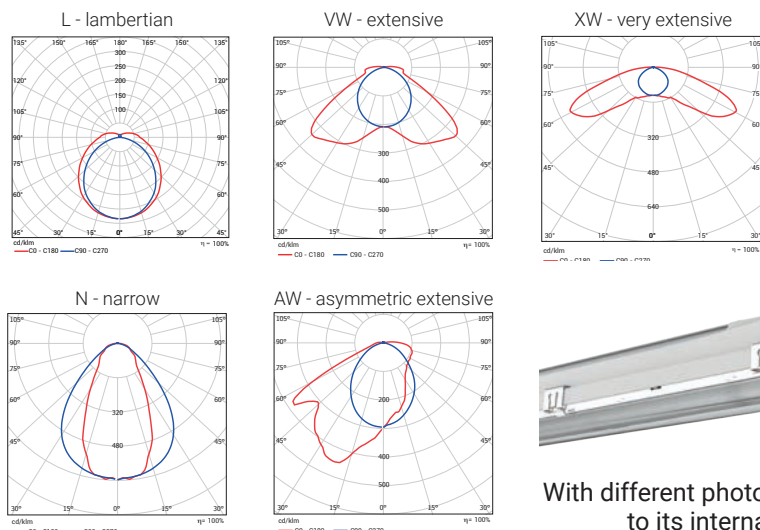

With different photometries thanks to its internal optics

Adjustable mounting clips along the rail of the housing, to adapt to different configurations in existing installations





FLEXIBILITY

Easy and flexible installation,
to reduce costs in refurbishment

SUSTAINABILITY

Sustainable design and high
efficiency lighting


VERSATILITY

Adaptable and efficient,
for any application

Side and top cable entries, with
multiple pre-marked positions to
increase installation flexibility

Complete range of photometries
from narrow to wide and
asymmetric lighting distributions

Quick and safe installation
thanks to its **crimped gear tray**

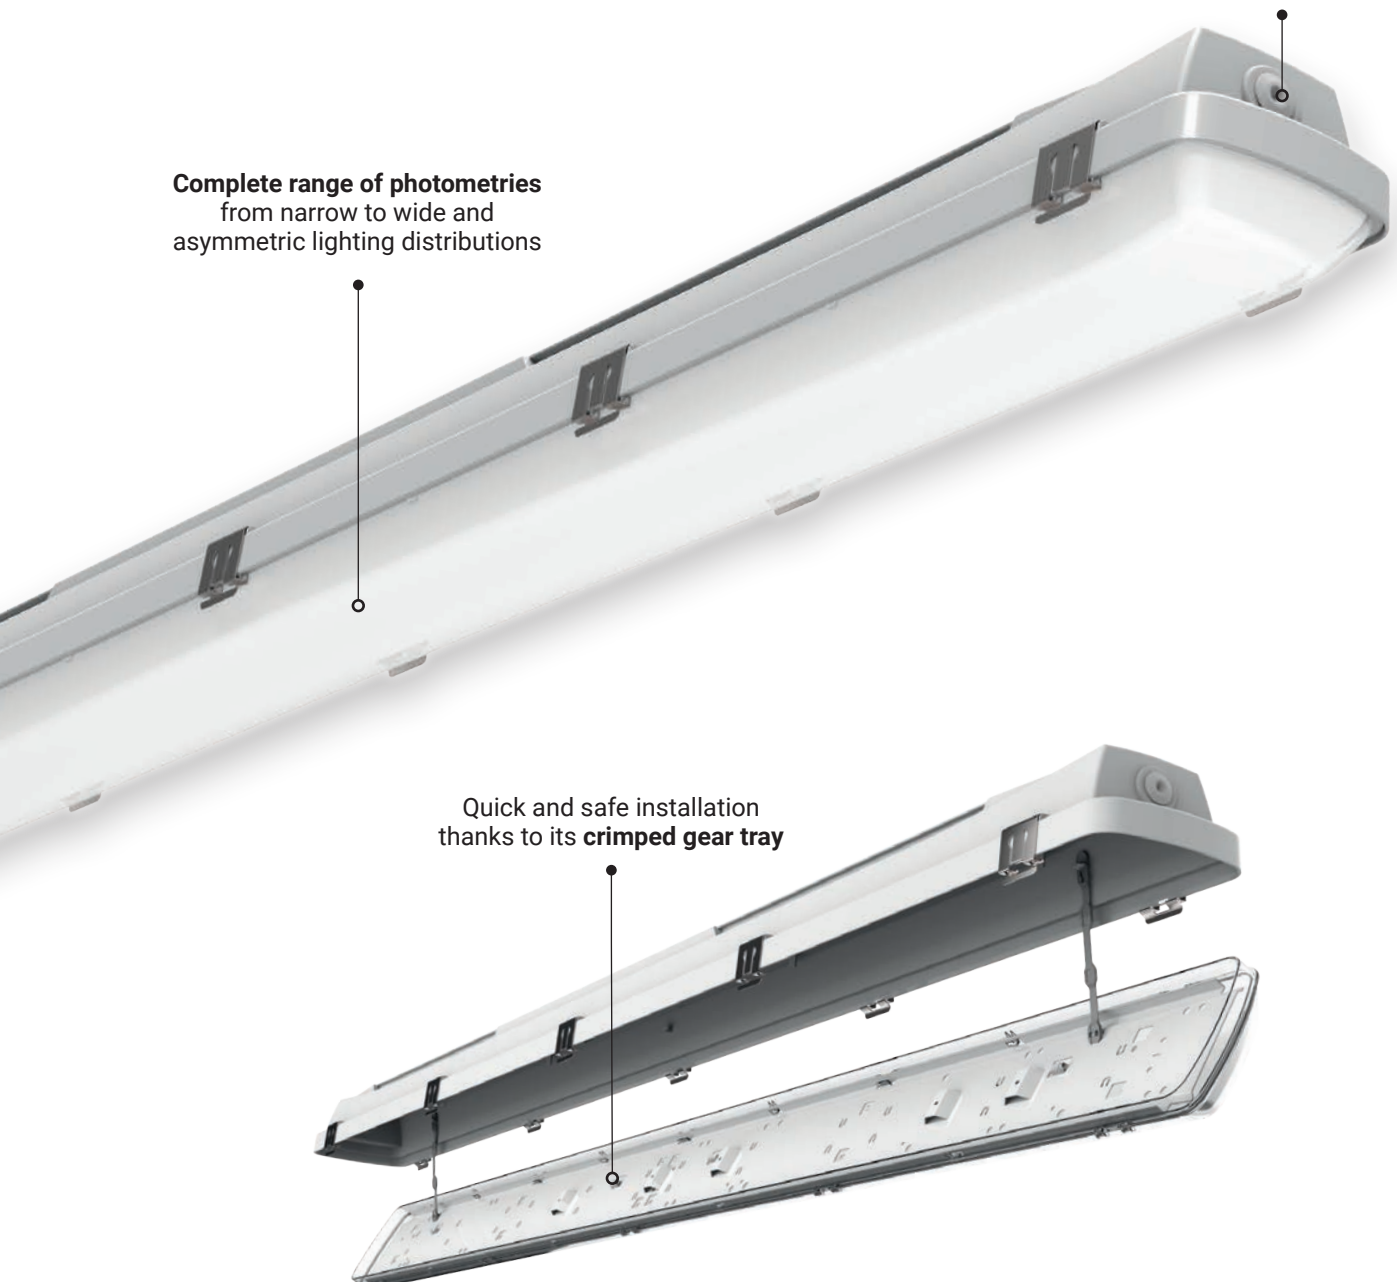

NEZA

Options Special options in grey under request

NEZA HE

LENGHT (mm)	OPTICS	LUMINOUS FLUX (lm)	CRI	LIGHT COLOUR (K)	DRIVER	DIFFUSER	CONNECTION	THROUGH WIRING	TEMPERATURE RANGE	
6: 600	L: lambertian	20: 2000	8: >80	30: 3000	ET: non-dimmable	PM: PMMA	CG: cable gland	3x1.5mm ² 5x2.5mm ² Other under request	HT: high temperature version -30°C +50°C	
12: 1200	N	25: 2500		40: 4000	ETDD: DALI dimmable	PC: polycarbonate				
15: 1500	VW	40: 4000		65: 6500						
	W	50: 5000								
	XW	60: 6000								
	AW	80: 8000								
		100: 100000								
		150: 150000								

More options available:

- Casambi control module
- Central battery system connection and emergency kit
- High frequency sensor
- Fast connector

NEZA STP

LENGHT (mm)	OPTICS	LUMINOUS FLUX	CRI	LIGHT COLOUR (K)	DRIVER	DIFFUSER	EMERGENCY KIT	THROUGH WIRING	
6: 600	L: lambertian	20: 2000	8: >80	40: 4000	ET: non-dimmable	PC: polycarbonate	EB1: 1 hour EB3: 3 hours	3x1.5mm ² 5x2.5mm ² Other under request	
12: 1200	N	40: 4000			ETDD: DALI dimmable	PM: PMMA			
15: 1500	VW	60: 6000							
	W								
	XW								
	AW								

NEZA ST

LENGHT (mm)	OPTICS	LUMINOUS FLUX	CRI	LIGHT COLOUR (K)	DRIVER	DIFFUSER	THROUGH WIRING
6: 600	L: lambertian	20: 2000	8: >80	40: 4000	ET: non-dimmable	PC: polycarbonate	3x1.5mm ² Other under request
12: 1200		40: 4000					
15: 1500		60: 6000					

Dimensions

